OASIS®



Barrier Washer Extractor



Capacity:35/60/110kg

Features

- Clean unloading side is separated from soiled loading side.
- Softmount with air bags, springs, and shock absorbers.
- Stainless steel drum, tub, and door.
- Stainless steel panels.
- Permanently lubricated bearings.
- Intelligent electronic balancing system.
- Automatic positioning of the inner drum.
- Standard configuration includes 5 chemical compartments and 5 hoses for dosing pumps.
- Mechanical and electronic double door locks.
- Heavy duty pnueumatic water valves, drain valves and steam valves.

Control

- Full-color touchscreen control offers 50 programs.
- Freely programmable and available in multiple languages.
- USB connection and networking capability.
- Remaining time indicator.

Options


- 2 pockets for 110kg.
- Automatic weighing.
- Programmable Logic Controller.

——High-end commercial and industrial laundry equipment manufacturer.


Specifications		GL35F	GL60F	GL110F
Control		Touch	Touch	Touch
Capacity	kg	35	60	110
Cylinder Diameter	mm	774	1065	1065
Cylinder Depth	mm	726	760	1268
Volume	liter	341	677	1129
Door Center to Floor	mm	936	1322	1322
Cold Water Inlet	inch	1	1.5	1.5
Hot Water Inlet	inch	1	1.5	1.5
Steam inlet	inch	1/2	1	1
Dosing inlet	inch	3/4	3/4	3/4
Compressed air inlet*	mm	8	8	8
Drain Diameter	mm	76	125	125
Motor Power	kW	3	7.5	11
Three-phase heating power	kW	18	30	45
Extraction Speed	RPM	760	650	650
G-Force		250	250	250
Voltage	380V/50Hz/60Hz/3ph			
	Contact us for other voltages			
Overall Width	mm	1290	1592	2100
Overall Depth	mm	1222	1448	1448
Overall Height	mm	1496	2035	2035
Net Weight	kg	700	2110	2360
Packing Width	mm	1390	1692	2200
Packing Depth	mm	1322	1548	1548
Packing Height	mm	1646	2185	2185

* Compressed air inlet only applies to steam heating models.


Oasis preserves the right to change the machines and the specification at any time without prior notice.

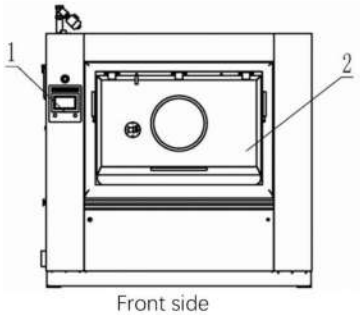


Front side



Left side



Upper side



Bottom side

1. Computer
2.loading door
3. Soap box
4. Lateral drainage
5.Bottow drainage
6.Delivery door
7.Air tube
8.Cold water inlet
9.Hot water inlet
10.Soap water inlet
11.Steam inlet
12.air inlet
13.Cable
14.Sampling

Jinan Oasis Dry Cleaning and Laundry Equipment Co.,Ltd.
Tel：+86-531-85701288 85711288
E-mail：inquiry@oasisle.com
Http://www.oasislaundrygroup.com
Add: No.39, Lan Xiang Middle Road, Jinan City, China